

POS

KIRTEC
RECHENSYSTEME GMBH

Burgenlandstr. 47
A- 6020 Innsbruck
Tel. +43 (0)512 343404
Fax +43 (0)512 343404 40
info@kirtec.com
www.kirtec.com

POS-3120

The One-of-a-kind High Integrated 10.4" POS Terminal

Features and Benefits:

- Intel® Atom™ Pineview D525 CPU
- 10.4" LCD display with touch
- Flexible design for versatile applications
- 3" easy loading thermal printer
- MSR
- Optional i-Button & fingerprint module
- Small footprint
- Streamline design



Fiery Red



Sky Blue

Pearl White

Stylish Black



i-Button



USB



Printer



CF Card & WLAN



Protech Authorised Distributor:

Toshiba TEC Australia Pty Ltd

Unit 1/9-11 South Street
Rydalmere, NSW 2116, Australia
TEL: +61 2 8845 6200
FAX: +61 2 9680 0892
E-mail: sales@toshibatec.com.au
http://www.toshibatec.com.au




ISO CERTIFIED
9001 14001


POS-3120

The One-of-a-kind High Integrated 10.4" POS Terminal


Top View

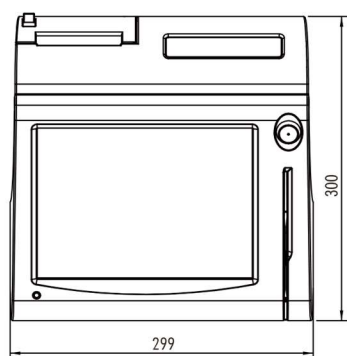

Side View

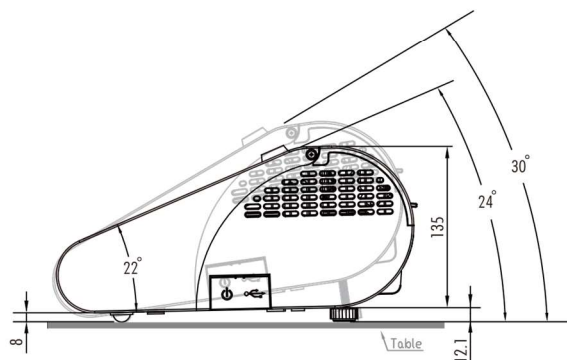

Rear View

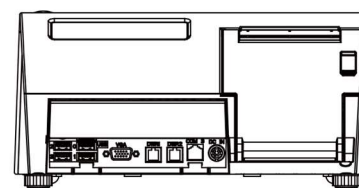

Unit: mm

Specification

System

CPU Support	Intel® Atom™ Pineview D525 CPU
Memory	2 x DDR3 SO-DIMM Slot, 1G DDR3 SO-DIMM (up to 4GB)
Core Logic	Intel® ICH8M
Network	10/100/1000 Base-T Fast Ethernet
Power Supply	120 watt power adaptor
System Weight	4.5 kg
Dimension (W x H x D)	300 x 299 x 135 mm (11.81" x 11.77" x 5.31")
O.S. Support	Windows 7/ XP/ XPE, WEPOS, POSReady2009

Storage

HDD	1x 2.5" SATA HDD (Standard 160GB HDD)
CF	Bootable Compact Flash slot for CF type I/O storages

I/O Ports

USB	5 x USB 2.0
Serial Ports	3 x DB-9, 1 x RJ45, +5/12V Selectable
PS/2	1 x PS/2 ports (default at keyboard)
LAN	1 x 10 / 100/1000 Mbps
VGA	1 x DB-15 VGA interface
Audio	1 x 2W speaker
Cash Drawer	1 x RJ11 Cash Drawer port (12V/24V)
Printer	3" easy loading thermal printer with Auto cutter

Display

LCD	10.4" TFT LCD
Max. Resolution	1024 x 768
Brightness	300 cd/m²
Touch Screen	5-wire Analog resistive
Tilt Angle	24 ~ 30 degrees

Environment

Operating Temp.	0 ~ 35° C
Storage Temp.	-20 ~ 60° C
Humidity	20 ~ 90%

Ordering Information

POS-3120	10.4" POS Terminal with Intel® Atom™ D525 CPU, 2G DDR3 SO-DIMM, 160GB HDD
VFD Customer Display	Vacuum Fluorescent Display, 20 columns and 2 lines, each column is 5 x 7 dots
MSR	JIS-I or II, ISO Track1+2+3 (PS/2 KB Interface)
Color	Black
OS	POSReady2009
Wireless LAN	Mini PCIe Wireless LAN Module 802.11 b/g (optional)
Fingerprint	Embedded Fingerprint module (USB interface) (optional)
i-Button	Read only, output through PS/2 KB interface (optional)

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd.
All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Oct. 2011.